


- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11

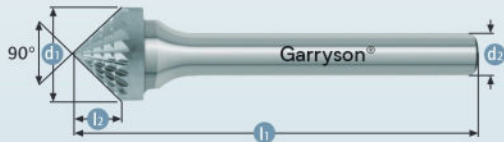

SHAPE **K, KSK, SK**


Countersink 90°

Cutting data **i** **767**

Movie **▶**

Tool No.	Art.	d1	l2	d2	l1	brazed	solid
SK-42M	GT2810D	3.0	1.5	3.0	38.0		✓
SK-1M	GT2820D	6.0	3.0	6.0	50.0		✓
SK-3M	GT2000D	10.0	4.7	6.0	52.0	✓	
SK-5M	GT2840D	12.7	6.3	6.0	54.0	✓	
*SK-6M	GT2800D	16.0	8.0	6.0	57.0	✓	
*SK-7M	GT2850D	19.0	9.5	6.0	58.0	✓	
*SK-9M	GT2880D	25.0	12.7	6.0	60.0	✓	

*8 mm shanks optional

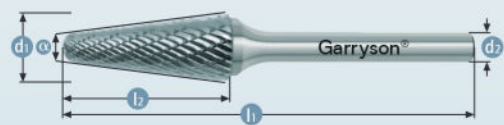

SHAPE **L, KEL, SL**

Ball nosed cone

Cutting data **i** **767**

Movie **▶**

Tool No.	Art.	d1	l2	d2	l1	brazed	solid	α°
SL-41M	GT4210D	3.0	9.5	3.0	38.0		✓	8°
-	GT4200D	3.0	8.0	3.0	38.0		✓	14°
SL-42M	GT4220D	3.0	12.7	3.0	38.0		✓	8°
SL-42ML2	GT4220D-50	3.0	12.7	3.0	50.0		✓	8°
SL-42ML3	GT4220D-75	3.0	12.7	3.0	75.0		✓	8°
SL-53M	GT4350D	5.0	12.7	3.0	38.0		✓	14°
SL-1M	GT4400D	6.0	16.0	6.0	50.0		✓	14°
SL-1ML6	GT4400DXL	6.0	16.0	6.0	171.0		✓	14°
SL-51M	GT4240D	6.3	13.0	3.0	45.0	✓		14°
SL-2M	GT4500D	8.0	22.0	6.0	70.0	✓		14°
SL-3M	GT4600D-1	9.6	30.0	6.0	74.0	✓		14°
SL-3ML6	GT4600D-1XL	9.6	30.0	6.0	182.0	✓		14°
SL-3MZ	GT4600D	10.0	20.0	6.0	65.0	✓		14°
SL-4M	GT4700D	12.7	32.0	6.0	76.0	✓		14°
SL-4M8	GT4700D-8	12.7	32.0	8.0	77.0	✓		14°
SL-4ML6	GT4700DXL	12.7	32.0	6.0	183.0	✓		14°
SL-5M	GT4800D-6	16.0	30.0	6.0	77.0	✓		14°
SL-5M8	GT4800D	16.0	33.0	8.0	78.0	✓		14°
*SL-7M	GT4900D-6	19.5	38.0	6.0	85.0	✓		14°

*8 mm shanks optional